

04/11/00
jc590 U.S. PTO

4-13-00

A

CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that this Correspondence and the documents referred to as attached therein are being deposited with the United States Postal Service in an envelope as "Express Mail Post Office to Addressee" mailing Label Number EI053129582US addressed to the: Commissioner of Patents and Trademarks, Washington, D.C. 20231, on the date typed below.

jc544 U.S. PTO
09/547395
04/11/00

April 11, 2000
Date

William C. Fuess
Typed Name of Person
Mailing Correspondence
and Documents

William C. Fuess
Signature of Person
Mailing Correspondence
and Documents

Attorney's Docket No.: UCSD99-037

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Honorable Commissioner of
Patents and Trademarks
Washington, D.C. 20231

TRANSMITTAL OF UTILITY PATENT APPLICATION FOR FILING

Dear Sir:

Transmitted herewith for filing is the utility patent application of inventors Mark Wang and Sadik Esener entitled **THREE-DIMENSIONAL OPTICAL DATA STORAGE IN FLUORESCENT DYE-DOPED PHOTOPOLYMER**. Enclosed are:

- X_ A duplicate copy of this transmittal letter.
- X_ One stamped, self-addressed, postcard for the PTO Mail Room date stamp.
- X_ One utility patent application containing pages 1 - 39, and
 - X_ a declaration or oath for the utility patent application including a power of attorney, and
 - X_ 1 copy of 10 sheets of **informal** drawings
- X_ A verified statement relating to small entity status.

2. The filing fee has been calculated as shown below:

For:	No. Filed	No. Extra	Small Entity Rate	Entity Fee
BASIC FEE			\$345	\$345
TOTAL CLAIMS	33 - 20 =	13	x \$ 9=	\$117
INDEP. CLAIMS	5 - 3 =	2	x \$39=	\$ 78
MULTIPLE DEPENDENT CLAIM(S)			+\$130=	\$
			TOTAL=	\$540

X_ A check in the amount of \$ 540 cover the filing fee is enclosed.

X_ A duplicate copy of this letter is enclosed.

Sincerely yours,

William C. Fuess

William C. Fuess
Registration No. 30,054
Attorney for Applicant(s)

FUESS & DAVIDENAS
Attorneys-at-Law
10951 Sorrento Valley Road
Suite II-G
San Diego, California 92121-1613
Telephone: (619) 452-8293
Facsimile: (619) 452-6035
E-mail: fuess@funtv.com

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Mark Wang and Sadik Esener

Case No.: UCSD 99-038

Title: **THREE-DIMENSIONAL OPTICAL DATA STORAGE IN
FLUORESCENT DYE-DOPED PHOTOPOLYMER**

VERIFIED STATEMENT UNDER 37 CFR §1.27
OF STATUS AS A SMALL ENTITY

We, Mark Wang and Sadik Esener, as individuals, hereby declare that:

1. We are independent inventors.
2. We are the inventors named in the above-identified patent application entitled **THREE-DIMENSIONAL OPTICAL DATA STORAGE IN FLUORESCENT DYE-DOPED PHOTOPOLYMER**, and are the owners of said application and invention.
3. We qualify as independent inventors as defined in 37 CFR §1.9, Subsection (c) in that we a) have not assigned, granted, conveyed or licensed, and b) are under no obligation under contract or law to assign, grant, convey or license any rights in the invention to any person who could not likewise be classified as an independent inventor if that person had made the invention, or to any concern which would not qualify as a small business concern or a non-profit organization under said §1.9.

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

4/11/00

Date

Mark Wang
Signature of Mark Wang

4-11-2000

Date

Sadik Esener
Signature of Sadik Esener

THREE-DIMENSIONAL OPTICAL DATA STORAGE IN FLUORESCENT DYE-DOPED PHOTOPOLYMER

REFERENCE TO RELATED PATENT APPLICATIONS

5 The present patent application is related to, and claims
priority from, U.S. provisional patent application Serial No.
60/128,989 filed April 12, 1999, for THREE-DIMENSIONAL OPTICAL
MEMORY IN FLUORESCENT DYE-DOPED PHOTOPOLYMER to the selfsame
inventors as is the present application. The present application
is related to U.S. patent application Serial No. 09/AAA,AAA filed
on an even date for THREE-DIMENSIONAL HOLOGRAPHIC STAMPING OF
MULTI-LAYER BIT-ORIENTED NON-LINEAR OPTICAL MEDIA, also to the same
inventors. The content of the related patent application is
incorporated herein by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

15 The present invention generally concerns optical data storage,
optical memories, polymers, multi-layer optical storage, and
volume, or 3-D, optical data storage.

20 The present invention particularly concerns the radiation
writing of monolithic multi-layer optical storage media, radiation-
written monolithic multi-layer optical storage media, and processes
of radiation-induced diffusional re-distribution of molecules
within a medium for the purposes of data storage.

2. Description of the Prior Art

25 Because of the relative economy and high storage capacity of
optical media, optical data storage in optical media has proven to
be a convenient means for the recording and physical distribution
of large quantities of information. However, despite the current
search for shorter wavelength lasers and more efficient coding

techniques, standard planar optical storage technologies may not be able to keep up with the ever-increasing demand for faster data rate, higher capacity, media.

As a result various new alternatives to optical technologies are currently being investigated. These alternatives include multi-layer reflective media, near-field recording, volume holography, two-photon storage, bit-oriented index modulation, and others. With the exception of near field recording all of these technologies take advantage of the increase in capacity that can be gained by expanding data storage into the third dimension of a thick media.

SUMMARY OF THE INVENTION

The present invention contemplates a new monolithic multi-layer optical storage media in which data may be stored through the diffusional re-distribution of fluorescent molecules within a polymer host.

In accordance with the present invention, the active portion of a radiation-writable media consists of (i) a photopolymer doped with (ii) a dye, preferably a fluorescent dye. The (i) photopolymer becomes selectively polymerized, and/or the (ii) dye - which can be (but need not be), and preferably is, a photoinitiator of photopolymerization -- promotes photopolymerization, where and when radiation, normally light radiation is high, most typically at the focal point of a lens, preferably a high numerical aperture lens. The dye molecules bond to the polymer matrix. As they do they become more highly concentrated in the polymerized regions, resulting in a selectively modulated data pattern, or the storage of information.

When the dye is, as is preferable, fluorescent, then the optical readout of stored data is based on detection of fluorescence rather than index modulation as in other photopolymer-

based memories. Accordingly the problems of media shrinkage and optical scatter are less of a concern.

5 An intensity threshold observed in the recording response of this media due to the presence of inhibitor molecules in the photopolymer permits the three-dimensional confinement of recorded bits, and therefore multi-layer recording. The non-linear recording characteristics of this material have been (i) investigated through a simple model of photopolymerization and diffusion, and (ii) verified experimentally. Both single and multiple layer recordings have been demonstrated.

10 In comparison to the prior art, where changes in volume media have previously been photochemically induced, the present invention offers several advantages. First, molecules within the pre-polymerized, un-exposed, optical medium exhibit such high diffusion and mobility as is, at the initiation of the process, desirable. This high mobility -- as opposed to, for example, a solid -- makes that constituent components of the volume media can "move around". In the prior art this has been useful so that the components can undergo photo-induced chemical reaction, or photochemistry. In the present invention the mobility is more concerned with the movement of a photo-detectable material, i.e., a dye.

15 However, when the prior art showed mobility of the constituent components of a volume media, such as in a liquid, this mobility proved troublesome. The same mobility that promoted significant photochemistry made that chemicals and photochemicals, both unchanged and changed, tended to "wander" in the matrix, "greying out" an exposed optical memory and "smearing" such domains (voxels) as are recorded.

20 However, in the present invention this initial mobility will cease. Initially the dye molecules are drawn to regions of exposure, depleting surrounding regions and increasing contrast. However, over a short period the radiation (light) exposure will cause such spreading polymerization as ultimately locks all constituent components into the positions by then assumed.

This is an essential characteristic, and forte, of the media of the present invention: mobility followed by immobility. After such minor lapse of time as permits all chemicals and photochemicals to "move into place" (over molecular dimensions), everything "locks up" and nothing is free to move, essentially forever. This is very beneficial. Effectively nothing changes in a memory once written. The dye can "bleach out" slightly after prolonged exposure to bright light, and/or over millions of radiation interrogations, but is essentially stable, and maintaining of a bright fluorescing capability indefinitely long. The exposed and polymerized radiation memory is essentially just as stable as present (circa 2000) memories of both optical and magnetic types that it serves to replace.

1. A Radiation Recordable Medium

In one of its aspects the present invention concerns an initially homogeneous medium that is suitably selectively differentiated by selective exposure to radiation.

What the medium consists of is rather straightforward: (i) a binder containing a (ii) photopolymer and (iii) a dye.

What transpires within the medium in the event of selective illumination is rather more complex, and requires an explanation based on theory. Although it is well established that theory of operation of an invention is not required for an enabling disclosure, we as inventors hereafter hypothesize and postulate and explain, as best we can, what we think is transpiring.

Notably, it is possible in our theories of our invention to place greater emphasis on certain characteristics, and phenomena, in some versions of our theories than in others. For example, and as will become clearer as our theories are expounded, in some versions of our theory the propensity of the preferred dye to be a photoinitiator of photopolymerization can be integrated into the theory of the invention, while in other, preferred, versions of the theory of the invention this property of the dye can be considered

merely incidental, and adjunct, to the main process.

Accordingly, our theories of our invention are not only hypothetical, but capable of being expressed in different words, and with different emphasis on the various component materials and processes. A practitioner of the photochemical arts reading our following theoretical descriptions, and considering the present invention, will thus realize that there are many different ways to describe the underlying phenomena, and that the scope of the present invention should not be unduly limited by arguments concerning the particular words that are variously chosen to express the various theories of the invention. Instead, the process of selective differentiation occurring in the present invention should be understood to broadly encompass the underlying phenomena, howsoever expressed.

2. A Composition of Matter

In a one of its embodiments, the present invention may be shortly, and broadly, be conceived of as a composition of matter selectively permanently differentiable in regions by selective radiation illumination. The composition consists essentially of (i) a monomer photopolymerizable to a polymer (i.e., a photopolymer), and (ii) a dye attaching the polymer. The dye both (i) migrates to, and (ii) is fixed in position at, regions photopolymerized by selective illumination with radiation.

Preferably (but not necessarily), the dye chemically attaches the polymer at these regions.

The composition may further include a binder in which is present the (i) photopolymer, and (ii) the dye.

The dye is preferably fluorescent.

3. A Radiation-Alterable Medium

The expression of the invention within the previous section 1. is -- while distinguished from the prior art by the (i) migration, and the (ii) fixation, of a dye -- is likely so short as to make it

difficult to fully understand, and appreciate, the theorized operation of the invention.

In somewhat greater detail, the present invention may alternatively be considered to be embodied in an initially homogeneous medium that is suitably selectively differentiated by selective exposure to radiation. The medium consists essentially of (i) a binder, containing (ii) a photopolymer, the photopolymer initially substantially homogeneously doped with (iii) a dye that is photoexcitable to bind to photopolymer.

Upon selective exposure of certain regions of the medium by radiation, each of (i) polymerization, (ii) dye migration and (iii) dye fixing will occur. The photopolymerization selectively progressively solidifies the photopolymer. Meanwhile, simultaneously, the dye molecules initially migrate to photopolymerized regions, and are there fixed in position by the photopolymer.

By this coaction a concentration gradient of dye in the matrix from unexposed to exposed regions results. In other words, a concentration gradient results from diffusion of the dye from unexposed to exposed areas.

The initially homogeneous matrix thus becomes selectively differentiated in that dye concentration is increased in exposed areas relative to unexposed areas.

The dye is preferably fluorescent.

The dye may be, but need not be, a photoinitiator of the photopolymerization.

The dye may be, but need not be, fixed in position by the photopolymer by action of chemically attaching the polymer. (It will in any case be mechanically fixed within the polymer.) In some instances -- as is the case with the preferred chemical constituents of the invention -- the dye chemically attaching the polymer also chemically attaches the monomer. This makes that the dye must, and does, migrate in accompaniment to its attached monomer until, and where, the monomer does photopolymerize to a

polymer.

4. A Radiation Recordable Medium

In still yet another of its aspects, the present invention may be considered to be embodied in a medium suitably selectively recorded by radiation.

The medium again consists essentially of (i) a host binder, containing (ii) a liquid monomer, in which molecular mobilities are relatively higher, that is photopolymerized into a solid polymer in which molecular mobilities are relatively lower, the monomer initially substantially homogeneously doped with (iii) a dye that is photoexcitable to bind to at least the polymer.

In terms of the most detailed theory of which we the inventors are possessed, we believe, and have experimental data supporting, that upon selective exposure of certain areas of the medium by radiation, both (i) polymerization and (ii) dye fixing will occur. The monomer undergoes a polymerization process that solidifies the medium. Meanwhile, simultaneously, radiation-exposed and photoexcited dye molecules bind to at least polymer molecules (and normally to the monomer molecules also, although this is not essential).

These dye molecules photoexcited to bind to at least the polymer molecules become, due to the relatively lower molecular mobility in the polymer, relatively fixed in their location, Meanwhile other, un-photoexcited, dye molecules remain relatively more mobile. This results in an initial migration and redistribution of dye to photoexposed regions until, dye migration being substantially complete, photopolymerization occurs, locking the migrated dye in place at a relatively higher concentration at the selectively exposed regions.

By this coaction of (i) polymerization and (ii) dye fixing there arises a concentration gradient of dye molecules in the material from the unexposed to the exposed areas. This

concentration gradient results, of course, from diffusion of the dye from unexposed to exposed areas. This dye concentration is, of course, increased in exposed areas relative to unexposed areas.

After the selective radiation exposure stops an excess concentration of dye molecules in the exposed areas serves as a permanent record of the selective radiation exposure.

Regardless of exactly how the composition of matter, or medium, or process of the present invention is expressed, many specific aspects of construction and operation are preferred in implementation of the present invention.

Using the particular language of this section 5., the "medium" preferably further includes an inhibitor of the photopolymerization so that in regions of low radiation exposure polymerization is inhibited nonetheless that other regions where radiation is concentrated become fully polymerized. This inhibitor of the photopolymerization typically consists essentially of oxygen.

In the most preferred embodiment the binder consists essentially of (i) a matrix, for example cellulose acetate propionate, and (ii) a solvent, for example acetone.

Meanwhile, the photopolymer consists essentially of (i) a monomer, for example dipentaerythritol pentaacrylate; (ii) a crosslinker, for example 1-vinyl-2-pyrrolidinone; (iii) an initiator, for example N-phenyl glycine; and (iv) a photosensitizer, for example camphor quinone. A polymer chemist will recognize the function of these constituent components, and the utility of each within a polymerizable system.

Meanwhile, the dye is preferably fluorescent, and, although permissively drawn from a large group, preferably consisting essentially of (i) Rhodamine B; and/or (ii) Bodipy Red.

In use of the medium the photopolymer is initially substantially uniformly doped with the dye which, as stated, is preferably fluorescent. The medium is selectively illuminated in regions to write and to store data as an optical memory, reading of the optical memory transpiring by inducing fluorescence of the dye.

When the selectively illuminated regions are voxels, the optical memory becomes a three-dimensional volume optical memory.

Reading of the optical memory transpires by detecting relative presence or absence of the dye, preferably through its fluorescent light emissions when stimulated.

5. A Method of Radiatively Recording Information in a Photosensitive Medium

In still yet another of its aspects the present invention is embodied in a method of radiatively recording information in a photosensitive medium.

The method commences by establishing a host binder, or matrix, containing (i) a photopolymer that is polymerized by radiation initially doped with (ii) a dye that photoinitiates photopolymerization. Here again is that theory of the invention, one of many, where photoinitiation is promoted by the dye. There is as much support for this theory as any other: the most preferred dye is in fact a photoinitiator of photopolymerization. It is not, however, believed critical to the present invention that it should be a photoinitiator. It is thus, as previously stated, very much a matter of what is emphasized in expounding different, but equally plausible, theories of the present invention.

This matrix is then selectively exposed in selected regions by radiation so that the dye migrates to redistribute itself to exposed regions until, dye migration being substantially complete, photopolymerization occurs, therein serving to lock the migrated dye in place at a relatively higher concentration at the selectively exposed regions. The regions where is present the dye represent the information recorded.

The recording of information is most commonly for the purpose of making a radiation memory. Reading of the radiation memory transpires by radiatively detecting the relative presence, or absence, of the dye in the regions of the matrix. This radiative detecting of the relative presence, or absence, of the dye is

preferably by inducing fluorescence in fluorescent dye.

6. A Radiation Memory System

In still yet another of its aspects the present invention is embodied in a radiation memory system that is at least writable, and that is preferably read-writable.

The system includes (i) a first laser; illuminating with a first laser beam (ii) a mask; which is imaged through (iii) a 4-f lens system; to a certain depth within (iv) a volume optical recording medium. This medium consists essentially of (i) a host matrix, containing (ii) a photopolymer that is polymerized by radiation, doped with (iii) a dye having a greater affinity for photopolymer than for the host matrix.

Upon selective exposure by the first laser through the mask of certain regions of the matrix, the dye will initially migrate to redistribute itself to radiatively exposed regions until, dye migration being substantially complete, photopolymerization will occur, locking the migrated dye in place at a relatively higher concentration at the selectively exposed regions.

This writable radiation memory system may optionally, between the first laser and the mask, further include a rotating diffuser serving to break up the spatial coherence of the first laser beam and randomizing the diffraction image of the first laser beam along its propagation path except when it is in focus.

It may still further optionally include a lens for bringing to a focus the first laser beam within a volume optical recording medium.

The memory system may be expanded and extended to reading. Such a read-write radiation memory system further preferably includes (i) a shutter means for blocking the first laser beam; (ii) a second laser for producing a second laser beam; (iii) a lens for focusing the second laser beam onto selectively exposed regions of the matrix that are at a particular depth within the volume optical recording medium, causing the exposed regions to fluoresce;

and (iv) a detector of the fluorescence as representing the read contents of the volume optical recording medium, ergo a read-write optical memory. The (iii) lens particularly preferably consists of a cylindrical lens, and the (iv) detector is preferably a CCD.

5 These and other aspects and attributes of the present invention will become increasingly clear upon reference to the following drawings and accompanying specification.

BRIEF DESCRIPTION OF THE DRAWINGS

10 Referring particularly to the drawings for the purpose of illustration only and not to limit the scope of the invention in any way, these illustrations follow:

15 Figure 1, consisting of Figures 1a through 1c, is a diagram showing the mechanism of recording where in (a) the media begins with a uniform distribution of fluorescent dye throughout the volume; in (b) light begins photopolymerization and simultaneously fixes dye to the polymer matrix while free dye will diffuse into the exposed areas leaving the unexposed regions depleted of dye; and in (c) after completion of the polymerization process the dye is held in a permanent polymer matrix.

20 Figure 2 is a schematic diagram of the optical system used for both recording and readout of the dye-doped photopolymer media.

 Figure 3 is a pictorial representation of a resolution target image recorded into the dye-doped photopolymer media and readout by the excitation of fluorescence in the recorded layer.

25 Figure 4, consisting of Figures 4a through 4c, are pictorial images of the edges of exposed regions and accompanying horizontal profiles where in all cases the left half of the image has first been exposed: Figure 4a showing edge enhancement observed 30 seconds after exposure as dye begins to diffuse into the exposed region; Figure 4b five minutes after exposure the profile resembles a flat top while the dip in intensity corresponding to the dye-

30

depleted region is gone; and with Figures 4c and 4d showing exposures that have been immediately followed by a uniform fixing exposure so that thirty seconds after the exposure of Figure 4c the edge enhanced structure is again apparent, however 5 minutes after exposure of Figure 4d the structure has not changed.

Figure 5 is a graph showing a numerical simulation of component concentrations and modulation ratio for low intensity exposure, $I_0 = 0.41 \text{ W/cm}^2$, where polymerization is inhibited.

Figure 6 is a graph showing numerical simulation of component concentrations and modulation ratio for high intensity exposure, $I_0 = 0.65 \text{ W/cm}^2$, where, after a short induction period, polymerization begins.

Figure 7 is a graph showing numerical simulation of modulation ratio as a function of recording intensity for images recorded at three different exposure energies. In all cases a sharp threshold is observed followed by a rapid increase in the degree of polymerization. Below the threshold point polymerization is negligible.

Figure 8 is graph showing fluorescence contrast ratio of images recorded for varying exposure energies at three different constant intensity levels.

Figure 9 is a graph showing fluorescence contrast ratio of images recorded at varying intensity levels for three different constant exposure energies.

Figure 10, consisting of Figures 10a through 10d, are pictorial images readout from four layers recorded in the media $70 \mu\text{m}$ apart in depth.

Figure 11 is a diagrammatic representation of the manner of the recovery of the recording of the images of Figure 10 by stepping the focal position of the objective lens starting with the deepest image first.

Figure 12, consisting of Figures 12a through 12f, are diagrams showing reactions during photopolymerization (fm. ref. 12)

Figure 13 is a diagrammatic representation of grey-level mask

array for fabricating conical lenses with uniform light in photopolymer.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Although specific embodiments of the invention will now be described with reference to the drawings, it should be understood that such embodiments are by way of example only and are merely illustrative of but a small number of the many possible specific embodiments to which the principles of the invention may be applied. Various changes and modifications obvious to one skilled in the art to which the invention pertains are deemed to be within the spirit, scope and contemplation of the invention as further defined in the appended claims.

1. A new monolithic, multi-layer optical media

The new monolithic, multi-layer optical media of the present invention has advantages over other new storage technologies in terms of ease of recording and readout, while sharing the same characteristics of very high density, fast access time, and parallel readout capability. The active portion of the media is a photopolymer - similar to that used for other volume optical media - which has in addition been doped with a fluorescent organic dye. Recording occurs during photopolymerization when the distributions of dye become more highly concentrated in the polymerized regions, therefore producing a modulated fluorescence readout pattern. In this architecture recordings are bit-oriented and are performed in a 2D parallel fashion. The readout which is based on excitation of fluorescence is non-destructive and is detected also in 2D parallel. Since index modulation, or changes in the material density, is not necessary for readout in this media some of the problems commonly associated with photopolymer memories such as shrinkage and optical scatter are less of a concern. This material

is non-erasable, therefore given its ease of production and low-cost materials this media is best suited for mass distribution ROM applications.

5 In the following sections we will investigate the properties of this new media. In Section 2 we will describe the material composition and the optical setups used for image recording. The fluorescence modulation process which is based on the diffusion of dye within the material will be described and shown experimentally. In Section 3 we will then examine the non-linear recording characteristics that have been observed for this material. Specifically, a threshold in the recording intensity response will be demonstrated that indicates that this material is suitable for multi-layer data storage. The origin of this threshold will be investigated with a simple model and verified through a series of recordings. In Section 4 we will present the results of a four-layer recording and readout demonstration and discuss the limitations of this media. Finally, in section 5 we give the best and most complete theory of which we are presently possessed as to how, why and in what best mode photopolymerization for purposes of three-dimensional optical data storage in fluorescent dye-doped photopolymer in accordance with the present invention proceeds.

2. Materials and Recording

25 The preferred embodiment of optical recording media in accordance with the present invention consists of an inert polymer host in which is suspended both a fluorescent dye and a complete photopolymer system. The photopolymer used here polymerizes in a standard free-radical reaction and consists of the monomer dipentaerythritol pentaacrylate, the crosslinker 1-vinyl-2-pyrrolidinone, the initiator N-phenyl glycine, and the photosensitizer camphor quinone. The recording wavelength of this material is determined by the photosensitizer which in this case has an absorption peak very close to the blue 488 nm line of an argon ion laser. In these results we have chosen Rhodamine B as

the fluorescent dye which absorbs well at the 543.5 nm wavelength of a green helium neon laser and has an orange fluorescence band from 560 nm to 640 nm. We have also tried a number of other dyes with similar success including Bodipy Red which has an absorption peak at 650 nm and fluorescence at 665 nm, thus allowing compact red diode lasers to be used for readout. All of these active components are suspended in a binder of cellulose acetate propionate and dissolved in acetone.

The pre-polymer mixture must be kept in a semi-viscous state in order for the active components to have a sufficiently high diffusion rate, therefore samples are prepared in sealed square cuvetts. After polymerization the material becomes solid and inert. Difficulties may arise from having a pre-polymerized material that is not solid since layers within the volume are potentially free to drift within the viscous medium unless the recorded layers are anchored to the bottom or all of the layers are recorded very rapidly in a simultaneous manner. For these experiments we have used the former approach to avoid movement of the data, however for this material to be useful as a mass distribution ROM media an appropriate optical data stamping technique should be developed so that information can be duplicated in the media in a rapid, inexpensive fashion. Implementing massively parallel recording may be one approach to rapid optical data stamping.

The mechanism of recording in this material is shown in Figure 1. Before recording the fluorescent dye molecules are evenly distributed throughout the media, however during the recording process a modulation of the fluorescence intensity according to the recorded pattern is developed. We believe that this modulation results from a binding of dye molecules to the polymer matrix since it has been observed that Rhodamine B can act itself as a photoinitiator for this monomer without any other additional dopants. Two processes are therefore initiated by exposure to blue light: polymerization and dye fixing. In the exposed areas, the monomer undergoes a polymerization process that solidifies the

matrix, while, simultaneously, photoexcited dye molecules bind to both monomer and polymer molecules. Dye molecules that are incorporated in the polymer matrix will become fixed in their location resulting in a concentration gradient of free dye molecules in the material. This concentration gradient causes more dye to diffuse in from the dark regions thereby increasing the total fluorescence level observed in the exposed areas and reducing that in the unexposed areas. Once the material has been fully polymerized and all of the free dye molecules have been bonded the fluorescence modulation is fixed and recorded images are permanent. Materials that operate on a principle similar to that described here have also recently been developed for holographic memories where the goal there is to maximize index modulation rather than fluorescence modulation.

Figure 2 shows the optical setup used for both recording and readout of data. An argon laser illuminates a mask which is imaged through a 4-f system to a certain depth within the recording media. The rotating diffuser immediately before the mask is necessary to reduce inter-layer crosstalk by breaking up the spatial coherence of the source and randomizing the diffraction image of the beam along its propagation path except when it is in focus. An Olympus 40x / 0.6 N.A. microscope objective that can variably compensate the spherical aberrations of up to 2.5 mm of plastic or glass is used to focus into the media. The position of the microscope objective is stepped axially to image to different depths within the media for multi-layer recordings. Images are recorded in exposures typically ranging from 2 sec to 20 sec with the argon laser focused down to recording intensities between 1 and 10 W/cm².

Readout is performed by blocking the recording beam and illuminating the recorded layer orthogonally with 350 μ W from the green He-Ne. The green beam is cylindrically focused into a thin sheet of light approximately 15 μ m thick to select just one layer out of the volume. The fluorescent dye absorbs the green light and then emits an orange fluorescence that is collected and imaged onto

the CCD detector. The orthogonal nature of the readout scheme permits 2D parallel detection of data which in a high speed readout system may allow extremely high data transfer rates.

5 A typical single plane recording of an air force resolution target is shown in Figure 3. The average contrast ratio of this image is less than 2:1. The smallest resolvable line pair group is group 5:6 which after de-magnification corresponds to $1.28 \mu\text{m}/\text{line pair}$, or a $0.64 \mu\text{m}$ minimum feature size. The material therefore exhibits sub-micron resolution which is a necessary requirement for
10 a high density optical storage media. In this picture the green illumination beam is entering from the right side. On the left side of the image it is possible to see some non-uniformities in the readout beam which look like shadows. These shadows are a result of the small index changes that occur when the material
15 polymerizes causing scatter and focusing in the beam. No attempt has been made in this work to minimize the index of refraction modulations, however further optimization of the material composition would be desirable in order to reduce these effects and improve the optical quality of the media. Recorded samples that
20 have been stored in the dark for several months have also shown a slight degradation in image quality most likely from evaporation of the solvent due to leaks in the seal of the cuvet. A more stable solvent would be preferred to improve the shelf life of the material.

25 The diffusion process of the dye during recording can be observed by exposing a large region in the material. Figure 4 shows four images in which the left half of the sample has been exposed to light. Immediately after exposure an edge enhancement of the boundary between the exposed and unexposed regions may be
30 observed as dye diffuses into the exposed region (see Fig. 4(a)). Dye concentration builds up most quickly closest to the edges leaving a dye-depleted region immediately outside the exposed area. Over a period of minutes the entire exposed region will slowly rise to a uniform fluorescence level (see Fig. 4 (b)). The edge

enhanced recording observed in (a) can be fixed, however, by immediately applying a second exposure that uniformly illuminates the entire image and bonds all of the dye in the sample. Figures 4(c) and (d) show a fixed image immediately after the second exposure and also 5 minutes later. It can be seen that the characteristic edge enhanced structure is still evident even several minutes after the exposure.

Because the fluorescent signal strength of a recorded data image is dependent on diffusion of dye from neighboring unexposed regions, it can be seen that the recorded fluorescence intensity may vary depending on the size of the recorded bit and the number of neighboring bits which have been recorded. For recording of digital data modulation codes such as a bi-phase (or Manchester) code may be necessary to ensure uniform signal strength of recorded bits.

3. Non-linear Polymerization

A. Modeling

In order for any particular media to be viable as a three-dimensional optical media it must be possible to selectively record layers within the volume without adversely affecting the information stored at other layers. This material exhibits an intensity threshold in its recording curve which results from the presence of the inhibitor oxygen. Oxygen is dissolved in the mixture because the samples have been prepared in air. In most cases, the presence of oxygen in photopolymers exhibits itself as an exposure time threshold,¹⁵ however in this material an intensity threshold may also be observed due to the material's high diffusion rate. The existence of this intensity threshold is independent of the presence of the fluorescent dye and can be demonstrated through a simple model of the polymerization process of a photopolymer.

The processes that will be considered in this model are: free radical generation by light, chain initiation (the creation of a radical site on a monomer or polymer), chain propagation (the addition of monomers to a polymer chain), chain termination (the neutralization of a polymer radical site), radical annihilation (the neutralization of free radicals with each other), inhibition (the neutralization of radicals by oxygen), and diffusion.^{16,17} We wish to write down the rate equations for the following components of the photopolymer: the monomer (M), the polymer (P), the inhibitor (H), the free-radical initiators ($R\bullet$), the radical sites on the polymer chain ($P\bullet$), and the neutral components such as the solvent or binder (N). For some arbitrary input light intensity $I(x,y,z,t)$ the rate equations are given as:

$$\frac{\partial [R\cdot]}{\partial t} = \left(\frac{\sigma \eta}{h\nu} \right) I(x, y, z, t) [R] + \alpha_R \nabla^2 [R\cdot] - k_i [R\cdot] ([M] + [P]) - k_a [R\cdot]^2 - k_t [R\cdot] [P\cdot] - k_h [R\cdot] [H] \quad (1)$$

$$\frac{\partial [H]}{\partial t} = \alpha_H \nabla^2 [H] - k_h [H] ([R\cdot] + [P\cdot]) \quad (2)$$

$$\frac{\partial [M]}{\partial t} = \alpha_M \nabla \cdot ([N] \nabla [M] - [M] \nabla [N]) - k_p [M] ([R\cdot] + [P\cdot]) \quad (3)$$

$$\frac{\partial [P\cdot]}{\partial t} = k_i [R\cdot] ([M] + [P]) - k_t [R\cdot] [P\cdot] - k_h [P\cdot] [H] \quad (4)$$

$$\frac{\partial [P]}{\partial t} = k_p [M] ([R\cdot] + [P\cdot]) \quad (5)$$

where the k 's correspond to the rate coefficients for the polymerization processes of chain initiation (k_i), chain propagation (k_p), chain termination (k_t), radical annihilation (k_a), and inhibition (k_h), the α 's correspond to the diffusion constants for free-radicals (α_R), inhibitors (α_H), and monomers and neutral components (α_M), σ is the absorption cross-section at the given wavelength, and η is the conversion efficiency of the initiator into free-radicals. We assume that the number of free-radicals generated is small compared to the total concentration of initiators (R). The various constants in these equations have either been measured from the material or taken as typical values from the literature.

Polymer and radical sites on the polymer are assumed not to diffuse. The remaining components must inter-diffuse as a multi-component system. In order to simplify this problem we may observe that the concentration of free-radicals and inhibitors is much smaller than that of monomers, polymers, and neutral components and therefore may be approximated to diffuse freely. We are left then with diffusion in a bi-component system (between monomers and neutral components) which – if we assume

the densities of these components are similar – may be approximated as shown in Eqn. 3 subject to the conservation of mass equation:¹⁶

$$[M] + [P] + [N] = \text{constant} \quad (6)$$

As polymerization occurs the concentration of monomer will drop, leading to diffusion of monomers into the exposed areas and expulsion of the neutral component.

Polymerization will cease when the neutral component has been completely expelled from the irradiated region and all of the monomer has been converted to polymer.

As a measure of the degree of both the polymerization and diffusion in the material we will define a modulation ratio which is directly proportional to the polymer plus the monomer content:

$$\text{modulation ratio} = \frac{[M](0,t) + [P](0,t)}{[M](2a,t) + [P](2a,t)} \quad (7)$$

where the modulation is compared between the center of the exposed region and a point one diameter away. A high modulation ratio will indicate a high degree of polymerization and diffusion of the monomer.

We wish to simulate the recording of a single bit in the media. To reduce the complexity of the computation a spherically symmetric intensity distribution was chosen,

$$I(r) = \begin{cases} I_0, & \text{for } r \leq a \\ 0, & \text{for } r > a \end{cases} \quad (8)$$

allowing the solution to be solved just in terms of r and t .

The rate equations are solved numerically for a given set of parameters. Figures 5 and 6 show the component concentrations at $r = 0$ during an exposure for two different intensity levels. We can see that for a low recording intensity, $I_0 = 0.41 \text{ W/cm}^2$ (see Fig. 5), the rate of radical generation and inhibitor consumption is slower than the diffusional

rate of the inhibitor and therefore the inhibitor concentration never reaches a zero level but instead plateaus into a quasi-equilibrium state. Polymerization in the exposed region is therefore negligible even for long exposure times. However for a higher recording intensity, $I_0 = 0.65 \text{ W/cm}^2$ (see Fig. 6), the inhibitor consumption rate is higher than the diffusional rate and the inhibitor concentration falls to a low enough level for polymerization to occur. It can be seen that after a short induction time monomers begin to be converted into polymer while more monomer flows into the exposed region, resulting in an increasing modulation ratio.

Somewhere between the two intensities shown in these two figures there will exist a certain cross-over threshold when the inhibitor consumption rate surpasses the compensating diffusion rate. In Figure 7 modulation ratio is plotted as a function of recording intensity for three different exposure energies. The exposure time is compensated in each according to the recording intensity to maintain a constant exposure energy. As expected, in each curve there is a distinct intensity threshold followed by a rapid increase in the degree of polymerization. For much higher intensities (and shorter exposure times) the modulation ratio begins to fall off again since there is less time for monomer components to diffuse. Radical annihilation - which is proportional to the square of the radical concentration if we assume that annihilation occurs as the re-combination of two free-radicals - will also become more of a factor at higher intensities and also reduce the polymerization rate.

In designing a material for a three-dimensional media, the sharp threshold observed here is the desired characteristic. For a beam sharply focused into the material, recording will occur only at the most highly focused spot where the intensity reaches above the recording threshold. Elsewhere, the media will not be affected. Sharpening the threshold - making the ratio between the threshold and saturation intensities closer to 1 - will have the

desirable effect of increasing the number of layers that may be recorded in a single media. The position of the threshold level may be modified by adjusting the balance between inhibitor consumption and diffusion either by increasing the initial concentration of inhibitors through the addition of another inhibitor besides oxygen, or by increasing the diffusion rate in the material through changes in the chemical composition or by heating of the material. The position of the saturation level is determined by the polymerization rate which can also be modified by a number of different parameters. Using the model we are able to choose intelligent directions for optimization of the media that maximize the threshold/saturation ratio.

It should be noted that this model excludes many higher-order polymerization effects. For example, in the model we have not taken into account the expected reduction in diffusion rate that will occur as the exposed regions reach higher levels of polymerization. Known as the gel effect, this reduction in diffusion would be expected to both increase the rate of polymerization (as the rate of chain termination is slowed) while decreasing the flow of monomer into the exposed regions. Differences in our model and our experimental results may be accounted for by the gel effect as well as other thermal and optical photopolymerization effects that have not been included.

3.2 Experimental

In the model described above we have only examined the polymerization process of a standard photopolymer and we have not included the fixing and diffusion of the fluorescent dye included in the fluorescent photopolymer media. We will now experimentally investigate the fluorescence contrast ratio that results during recording in this media which includes the non-linear processes of both the polymerization and dye diffusion. Although polymerization modulation ratio and fluorescence contrast ratio are not equivalent measurements, we can use the more easily observable fluorescence

contrast ratio as some indication of the degree of polymerization since fluorescence modulation will not occur unless the dye position has become fixed.

We have experimentally investigated the recording characteristics of this material through a series of recordings under different exposure conditions while measuring the observed fluorescence contrast ratio for 4 μm wide bars. Figure 8 shows the resulting contrast ratio of recordings for varying exposure energies at three different recording intensities. The two higher intensities show a short induction period followed by polymerization, however for the lowest recording intensity (0.42 W/cm^2) no image was formed regardless of the exposure energy. The apparent recording intensity threshold may be observed more clearly in Figure 9 where contrast ratio is plotted over a range of different intensities. In all recordings the exposure time was adjusted to produce a constant total exposure energy. It can be seen that below a recording intensity of approximately 0.6 W/cm^2 no image is formed. The contrast ratio increases rapidly for intensities higher than the threshold and then plateaus at different levels depending on the total exposure energy. Experimentally we observe the same intensity threshold effect predicted by the polymerization model. This threshold now allows us to perform multi-layer recording.

4. Multi-Layer Recording

To demonstrate the multi-layer capability of this media four images at varying depths were recorded (see Fig. 10). Images were recorded in order from deepest to shallowest with a spacing between layers of 70 μm . It can be seen that the deeper images are somewhat brighter than the images closer to the surface. We have determined from experiment that this is not a result of the recording order but more likely a difference in the material component concentrations in the thin layer closest (< 100 μm) to the surface of the media. Evaporation of the solvent during sample

preparation may result in reduced dye mobility and therefore a reduced image contrast. A small degree of inter-layer crosstalk is also visible between the images. Because the illumination beam for the mask was not completely uniform the recording intensity had to be increased in order to record the outer edges of each image. The higher intensity in the center of each image exceeds the intensity threshold condition at neighboring planes resulting in crosstalk. This difficulty highlights the importance of having a very uniform illumination beam maintained at just above the threshold recording intensity.

The minimum acceptable spacing between layers is determined by the effective numerical aperture of the recording optics as well as the degree of non-linearity in the recording process. The depth over which an image is recorded will be determined by the rate at which the focused image expands and falls below the recording intensity threshold. The focal depth of a lens is inversely proportional to the square of the N.A. In these recordings the N.A. of the recording optics is only moderately high, moreover the features sizes in the images are very large. When the feature sizes are reduced, diffraction out of the focal plane will more quickly blur the image data and produce a uniform, low intensity background that will not be recorded on preceding or subsequent layers. It should also be noted that when using high N.A. optics it becomes necessary to compensate for the spherical aberrations induced by imaging through a thick medium. This can be done either through the use of aberration corrected optics - as was used here - or fluid immersion lenses which have the added advantage of allowing even higher numerical apertures although typically shorter working distances.

In addition to the layer spacing, the total usable thickness of the material will determine the maximum number of layers recordable in a single media. As we have mentioned, the maximum thickness of the media can be limited by optical clarity concerns. Optimizations of the material composition that minimize index of

refraction modulations and density changes of the material during recording will allow the use of thicker and therefore higher capacity media.

4. Photopolymerization Theory

4.1 The Photopolymerization Process

The process of photopolymerization has been extensively studied, so the reader is referred to other sources for a more exhaustive review. There are in general two types of photopolymerization, free radical and ionic, the difference between the two is that in the latter the photon excites an electron on the monomer directly to a π -electronic state, rather than by a photoinitiator intermediary. This usually requires UV wavelengths, whereupon the molecule de-excites into a radical state, becoming a radical monomer. However, most polymers are highly absorptive in the UV, thus for using materials with a mixture of properties or for creating structures that depend upon the intensity profile, this sort of addition polymerization is not appropriate. This dissertation relies upon free radical polymerization to create structures in photopolymer, the primary steps of which are detailed in Figure 5, consisting of Figures 5a through 5f.

The basic chemical constituents for radical polymerization reaction are a photoinitiator, a monomer basic unit, and a photosensitizer. The latter determines the wavelength range of photopolymer, since the photosensitizer molecule commences the reaction by absorbing a photon and thus exciting one of its electrons to a higher energy state. If this molecule collides with an initiator molecule within its excitation lifetime, then the initiator molecule transfers an electron to the sensitizer, causing the initiator to become a free radical. When this free radical encounters a monomer, the affinity for the radical is such that a double carbon bond on the monomer is changed into a single bond, allowing the radical to attach itself to the monomer and also leaving a radical site on the monomer unit. Thus there is now left

what is called a 'radical monomer', which can act as a free radical photoinitiator does, attaching additional monomer units to itself in a serial fashion, while still maintaining a radical site on the chain. This process is called chain propagation, and continues
5 until the chain is terminated by collision with another free radical of the opposite sign. Since this is an random process, different chain lengths are generated, the distribution of the lengths dependant upon temperature, initiator and photosensitizer concentration, etc. and is Maxwellian in nature.

10 One can also add an additional agent called a cross-linker to the above chemical constituents. The cross-link agent creates additional radical sites on the monomer, causing the chain to grow 'branches' which increase the molecular weight of the resulting polymer, causing the polymerized region to become denser. Since
15 density changes are correlated with refractive-index changes through the Lorentz-Lorentz equation, the addition of a cross-linker agent is often desirable.

20 Inhibitors such as oxygen are present in any photopolymer mixture that is not prepared in a neutral environment, such as nitrogen atmosphere or vacuum. These inhibitors usually have a higher affinity for the radical initiators than the monomers do, combining with the radical initiators to create a neutral molecule. Thus the photopolymerization process described above does not start
25 until all the inhibitors in a local region that is being irradiated have been consumed. This is manifested on a macroscopic scale as a 'threshold' in recording time before reaching the linear recording regime. Although pre-exposure of the photopolymer mixture removes the majority of these inhibitors, continual diffusion from the air into the mixture will always require some
30 intensity threshold to be crossed before polymerization can occur.

Consider the localization of the polymerization process. Within a constant irradiance region, there will be concentration fluctuations of initiator, inhibitors, photosensitizers and monomers. These will create localized regions where the recording

threshold is crossed first and polymerized 'seeds' are formed. Thus in this way concentration gradients (chemical potential gradients, in the language of statistical mechanics) are formed, drawing in more monomer so that polymerization grows outwards from these seeds, while less-active components are forced out. Now consider the polymerization process between adjoining regions, one with a high irradiance and one with a low irradiance. In the former, radical initiators and monomers are being formed at a high rate as compared to the latter. Monomer units are drawn in from the low-illuminated area to the high illuminated area, the monomer traveling on the order of a diffusion length.

Of the higher-order effects in the previously described process that couple through the polymerization rate equations to create nonlinear effects between differently illuminated regions, two will be mentioned here. The first comes about because the densification of the polymer as time goes forward causes a larger decrease in the diffusion rate of the photopolymer in regions of high irradiance as compared to those exposed to less intensity. Called the gel effect, this manifests itself as an increase in the polymerization rate since the rate of chain termination is slowed (large molecules become 'trapped' and additional radicals find it harder to diffuse past denser chain networks) and the flow of monomer into these regions decreases as well. Combined, one should see a more rapid onset of polymerization than expected while having a lower-than expected index modulation.

Additionally, radical-radical collisions leading to radical annihilation are more likely to occur in the high-irradiated regions as compared to the low-illuminated regions. This reaction pathway by removing two radicals decreases the number of radicals that could cause early polymer chain termination, leading to longer, more crosslinked polymer chains. In this way a greater index modulation is set up between the regions of high irradiance as compared to the low irradiance regions despite eventual total polymerization. This is seen in figure 4, showing a one-component

formatted polymer block in which a striped irradiance pattern created the high-contrast formatted regions while the low-contrast regions where polymerized later with an uniform irradiance. To further increase this modulation, it is possible to use multiple types of monomers, each with a different density and reactivity ratio, called a c/e ratio. This ratio is a measure of the chemical affinity of one monomer with respect to another monomer for attaching onto a polymer chain. Thus to maximize the index break it is best to select a high molecular-weight (high refractive index) monomer with a high c/e ratio and a low molecular weight monomer with a low c/e ratio.

There are two problems associated with polymerization as a method to manufacture precision structures. The first is that the densification of the media causes a volume change which causes shrinkage (change in the physical dimensions of the structure). Thus precise placement of small structures is difficult in polymers which have large shrinkage. However, other inventors and authors have proposed solutions leading to a low-shrinkage polymer. The second problem with using photons as a means for polymerization is light scattering. The seed regions where polymerization commences more often than not grow non-uniformly, creating scattering centers upon termination of polymerization in the structure. Methods to avoid this problem are currently under investigation.

5. Conclusion

The present specification has taught a new optical recording media that records information through the re-distribution of a fluorescent dye within a polymer host. This material exhibits an intensity threshold response due to the diffusional nature of the recording process allowing the three-dimensional confinement of recorded bits. Our conceptual description of the recording process has been verified by a simple model of photopolymerization and diffusion, and recordings in this material have been shown to exhibit both high resolution and the capability for multiple

layers. Four layers have been recorded on 70 μm layer spacings with only a minimal amount of inter-layer crosstalk being visible. The recording and readout architectures of this memory both permit parallel optical transfer of data which eventually may provide extremely high data transfer rates, while the multi-layer capability of this media indicates that high capacities may be achieved while still allowing fast access times. Improvements must still be made in the material composition particularly in terms of material stability, nonlinearity, and optical quality. Provided that a suitable optical data stamping technique can be developed, the high recording sensitivity and ease of manufacture demonstrated here indicate that this material may have potential as a high capacity, low cost media for information storage and distribution.

In accordance with the preceding explanation, variations and adaptations of three-dimensional optical data storage in a fluorescent dye-doped photopolymer in accordance with the present invention will suggest themselves to a practitioner of the optical storage, and optical storage materials, arts.

In accordance with these and other possible variations and adaptations of the present invention, the scope of the invention should be determined in accordance with the following claims, only, and not solely in accordance with that embodiment within which the invention has been taught.

CLAIMS

What is claimed is:

1. A composition of matter selectively permanently differentiable
in regions by selective radiation illumination, the composition
5 consisting essentially of

a monomer photopolymerizable to a polymer; and

a dye attaching the polymer;

wherein the dye both (i) migrates to, and (ii) is fixed in
position at, regions photopolymerized by selective illumination
10 with radiation.

2. The composition of matter according to claim 1 wherein the dye
not only becomes (ii) fixed in position at photopolymerized
regions, but chemically attaches the polymer at these regions.

3. The composition of matter according to claim 1 further
15 consisting essentially of

a binder in which is present the (i) monomer
photopolymerizable to a polymer, being thus a photopolymer, and
(ii) the dye.

4. The composition of matter according to claim 1
20 wherein the dye is fluorescent.

5. An initially homogeneous medium that is suitably selectively
differentiated by selective exposure to radiation, the medium
consisting essentially of

a binder; containing

25 a photopolymer, the photopolymer initially substantially
homogeneously doped with

a dye that is photoexcitable to bind to photopolymer;

wherein upon selective exposure of certain regions of the
medium by radiation, each of (i) polymerization, (ii) dye migration

and (iii) dye fixing will occur, the photopolymerization selectively progressively solidifying the photopolymer, while, simultaneously, dye molecules initially migrate to photopolymerized regions and are there fixed in position by the photopolymer;

5 wherein a concentration gradient of dye in the medium from unexposed to exposed regions results, this concentration gradient resulting from diffusion of the dye from unexposed to exposed areas;

10 wherein the initially homogeneous medium becomes selectively differentiated in that dye concentration is increased in exposed areas relative to unexposed areas.

6. The medium according to claim 5
 wherein the dye is fluorescent.

15 7. The medium according to claim 5
 wherein the dye is a photoinitiator of the photopolymerization.

8. The medium according to claim 5
 wherein the dye is so fixed in position by the photopolymer by at least an action of chemically attaching the polymer.

20 9. The medium according to claim 8
 wherein the dye chemically attaching the polymer does also chemically attach the monomer, making that it migrates in accompaniment to the attached monomer until, and where, the monomer does photopolymerize to a polymer.

25 10. A medium suitably selectively recorded by radiation consisting essentially of
 a host matrix; containing
 a liquid monomer, in which molecular mobilities are relatively higher, that is photopolymerized into a solid polymer in which

molecular mobilities are relatively lower, the monomer initially substantially homogeneously doped with

a dye that is photoexcitable to bind to at least the polymer;
wherein upon selective exposure of certain areas of the matrix
5 by radiation, both (i) polymerization and (ii) dye fixing will occur, the monomer undergoing a polymerization process that solidifies the matrix, while, simultaneously, radiation-exposed and photoexcited dye molecules bind to at least polymer molecules;

wherein dye molecules photoexcited to bind to at least the
10 polymer molecules become, due to the relatively lower molecular mobility in the polymer, relatively fixed in their location while other un-photexcited dye molecules remain relatively more mobile, resulting in an initial migration and redistribution of dye to photoexposed regions until, dye migration being substantially
15 complete, photopolymerization occurs, locking the migrated dye in place at a relatively higher concentration at the selectively exposed regions;

wherein there is a concentration gradient of dye molecules in the material from the unexposed to the exposed areas, this
20 concentration gradient resulting from diffusion of the dye from unexposed to exposed areas;

wherein dye concentration is increased in exposed areas relative to unexposed areas;

wherein after selective radiation exposure stops an excess
25 concentration of dye molecules in the exposed areas serves as a record of the selective radiation exposure.

11. The medium according to claim 10

wherein the dye is photoexcitable to bind to the monomer as well as the polymer;

30 wherein initial migration and redistribution still transpires, with the dye and the monomer still photopolymerizing to dye and polymer more selectively pronouncedly in photoexcited, exposed areas.

12. The medium according to claim 10 further including
an inhibitor of the photopolymerization so that in regions of
low radiation exposure polymerization is inhibited nonetheless that
5 other regions where radiation is concentrated become fully
polymerized.

13. The medium according to claim 12 wherein the inhibitor of the
photopolymerization consists essentially of
oxygen.

10 14. The medium according to claim 10 wherein the host matrix
consists essentially of
binder; and
solvent;
wherein the dye has a greater affinity for the photopolymer
15 than for the binder and the solvent.

15 15. The medium according to claim 14 wherein the binder consists
essentially of
cellulose acetate propionate;
and wherein the solvent consists essentially of
20 acetone.

16. The medium according to claim 10 wherein the photopolymer
consists essentially of
a monomer;
a crosslinker;
25 an initiator; and
a photosensitizer.

17. The medium according to claim 16 wherein the monomer consists
essentially of
dipentaerythritol pentaacrylate;

wherein the crosslinker consists essentially of

1-vinyl-2-pyrrolidinone;

wherein the initiator consists essentially of

N-phenyl glycine; and

5 wherein the photosensitizer consists essentially of
camphor quinone.

18. The medium according to claim 10 wherein the dye is drawn from
the group consisting essentially of

Rhodamine B; and

10 Bodipy Red.

19. The medium according to claim 10

wherein the photopolymer is initially substantially uniformly
doped with the dye.

20. The medium according to claim 10

15 wherein the dye is fluorescent.

21. The medium according to claim 20 selectively illuminated in
regions to write and to store data as an optical memory, reading of
the optical memory transpiring by inducing fluorescence of the dye.

20 22. The medium according to claim 21 wherein the selectively
illuminated regions are voxels, the optical memory being a three-
dimensional volume optical memory.

23. The medium according to claim 10 selectively illuminated in
regions to write and to store data as an optical memory, reading of
the optical memory transpiring by detecting relative presence or
25 absence of the dye.

24. The medium according to claim 23 wherein the selectively
illuminated regions are voxels, the optical memory being a three-

dimensional volume optical memory.

25. A method of radiatively recording information in a photosensitive medium, the method comprising:

5 establishing a host matrix containing a photopolymer that is polymerized by radiation initially substantially uniformly doped with a dye that photoinitiates photopolymerization;

10 selectively exposing selected regions of the matrix by radiation so that the dye migrates to redistribute itself to exposed regions until, dye migration being substantially complete, photopolymerization occurs, therein serving to lock the migrated dye in place at a relatively higher concentration at the selectively exposed regions;

wherein the regions where is present the dye represent the information recorded.

15 26. The method according to claim 25 wherein the recording of information is for the purpose of making a radiation memory, and wherein the method further comprises:

20 radiatively reading the radiation memory by radiatively detecting the relative presence, or absence, of the dye in the regions of the matrix.

27. The method according to claim 26 wherein the radiatively detecting of the relative presence, or absence, of the dye is by inducing fluorescence in the dye.

28. A writable radiation memory system comprising:

25 a first laser; illuminating with a first laser beam a mask; which is imaged through

a 4-f lens system; to a certain depth within

a volume optical recording medium consisting essentially of a host matrix, containing

30 a photopolymer that is polymerized by radiation, doped

with

a dye that photoinitiates photopolymerization;

wherein upon selective exposure by the first laser through the mask of certain regions of the matrix, the dye will initially migrate to redistribute itself to radiatively exposed regions until, dye migration being substantially complete, photopolymerization will occur, locking the migrated dye in place at a relatively higher concentration at the selectively exposed regions.

29. The writable radiation memory system according to claim 28 that, between the first laser and the mask, further comprises:

a rotating diffuser serving to break up the spatial coherence of the first laser beam and randomizing the diffraction image of the first laser beam along its propagation path except when it is in focus.

30. The writable radiation memory system according to claim 28 that, in the optical path of the first laser beam, further comprises:

a lens for bringing to a focus the first laser beam within the volume optical recording medium.

31. The writable radiation memory system according to claim 28 expanded and extended to reading, the read-write radiation memory system further comprising:

a shutter means for blocking the first laser beam;

a second laser for producing a second laser beam;

a lens for focusing the second laser beam onto selectively exposed regions of the matrix that are at a particular depth within the volume optical recording medium, causing the exposed regions to fluoresce; and

a detector of the fluorescence as representing the read contents of the volume optical recording medium, ergo a read-write

optical memory.

32. The read-write radiation memory system according to claim 31
wherein the lens comprises:
a cylindrical lens.

5 33. The read-write radiation memory system according to claim 30
wherein the detector comprises:
a CCD.

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
221

ABSTRACT

A host matrix -- normally a binder such as cellulose acetate propionate in a solvent such as acetone -- contains a radiation-polymerizable photopolymer -- normally a monomer like dipentaerythritol pentaacrylate in combination with a crosslinker like 1-vinyl-2-pyrrolidinone, an initiator like N-phenyl glycine, and/or a photosensitizer like camphor quinone -- that is initially uniformly doped with a stable dye -- typically Rhodamine B and/or Bodipy Red -- that photoinitiates photopolymerization. Upon selective exposure of certain regions of the matrix by radiation, most normally laser light radiation, the dye will initially migrate and redistribute itself to radiatively-exposed regions until, dye migration being substantially complete, photopolymerization will occur, locking the migrated dye in place at a relatively higher concentration at the selectively exposed regions. The dye therein stably located can be optically detected by, preferably, light-radiation-stimulated fluorescence. The medium thus serves as an optical memory, including of the volume type, that can be reliably permanently written quickly and inexpensively at high density.

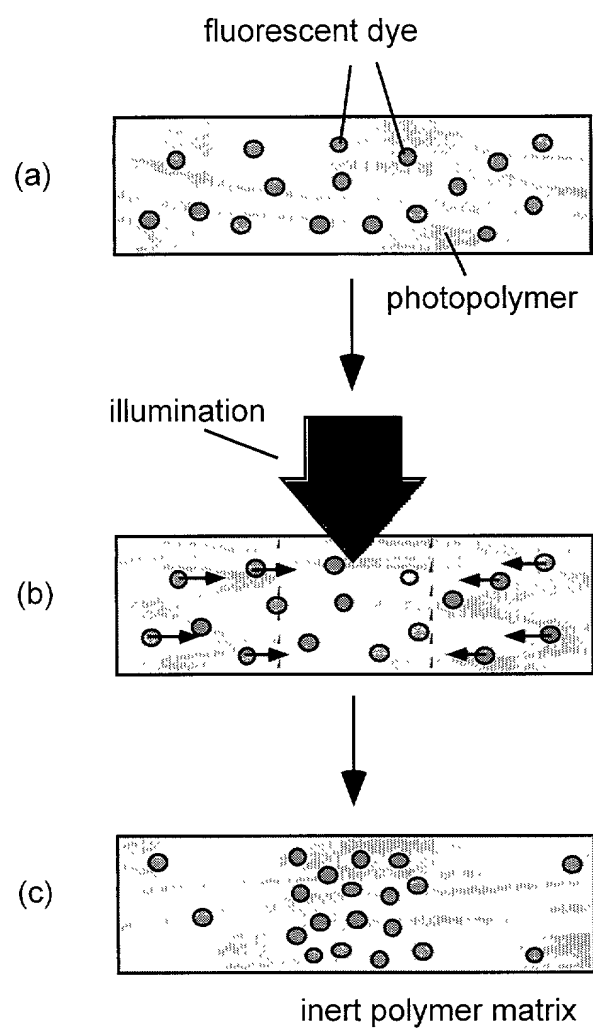


Figure 1

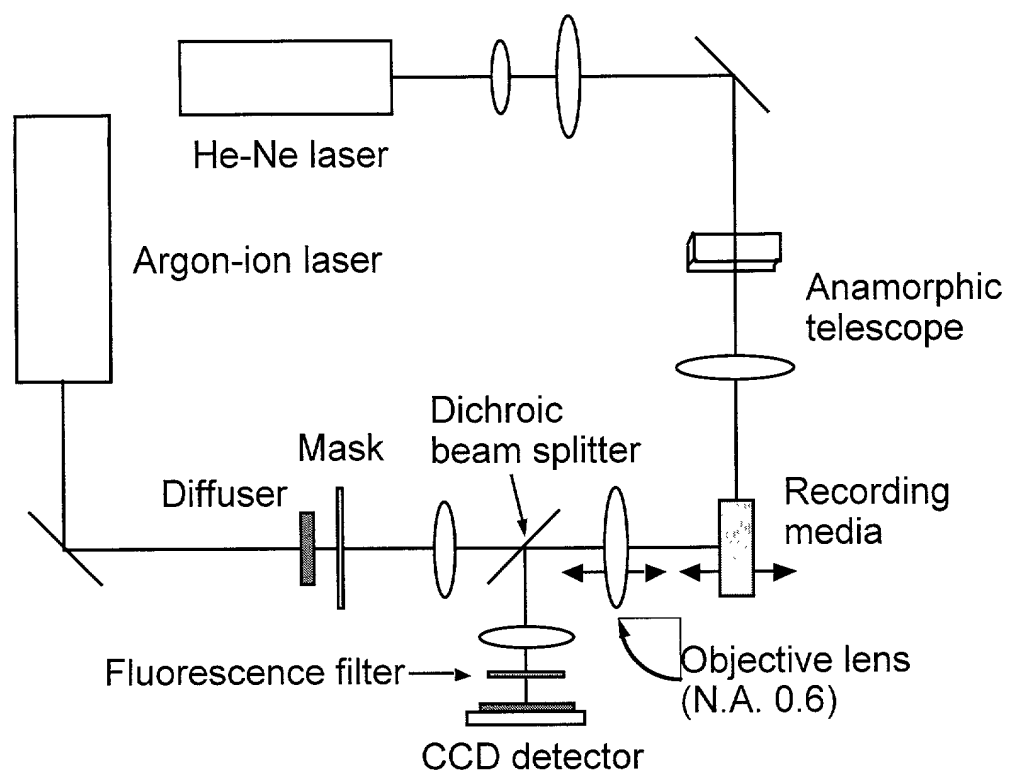


Figure 2



Figure 3

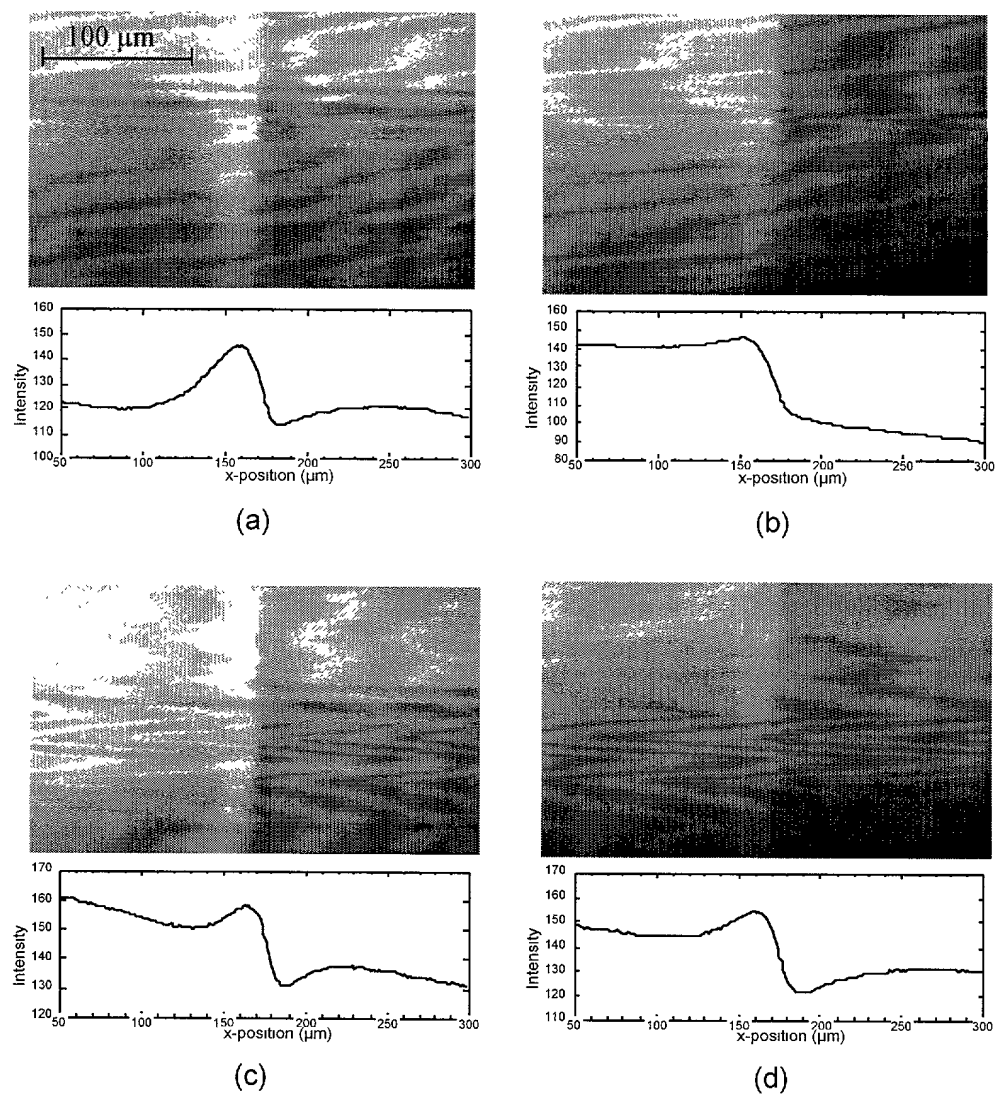


Figure 4

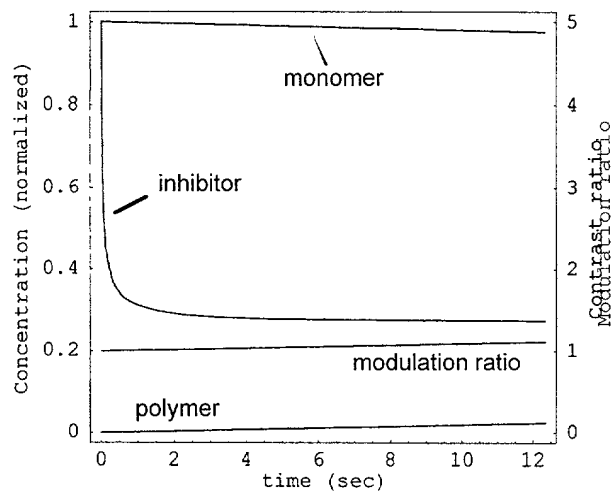


Figure 5

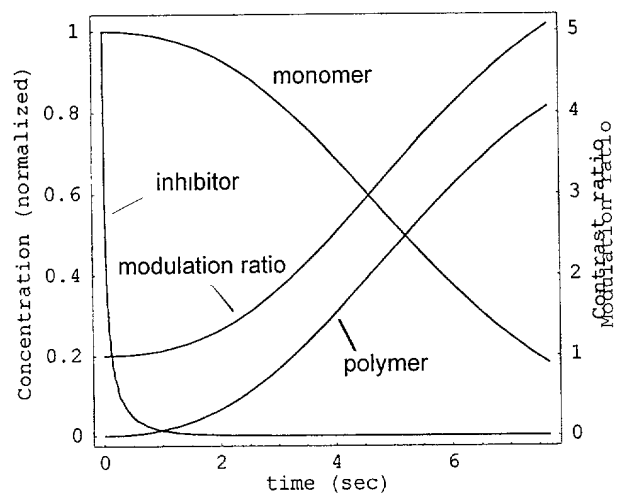


Figure 6

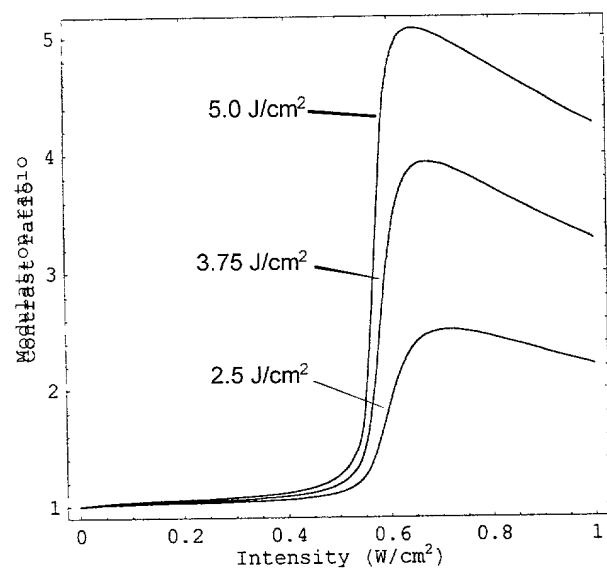


Figure 7

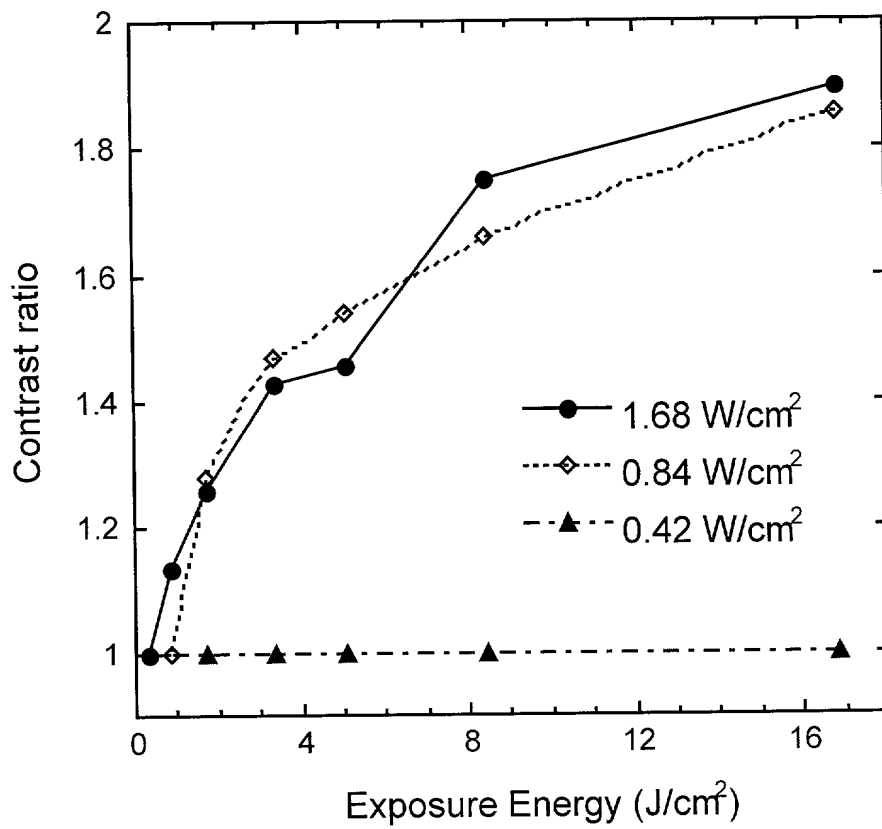


Figure 8

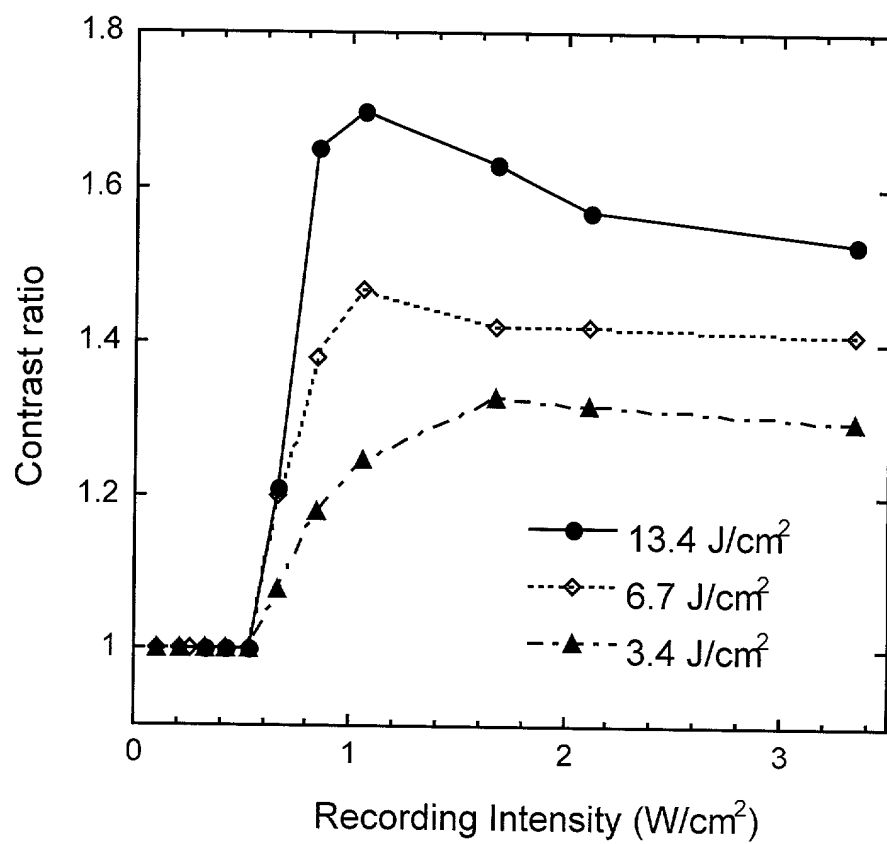


Figure 9

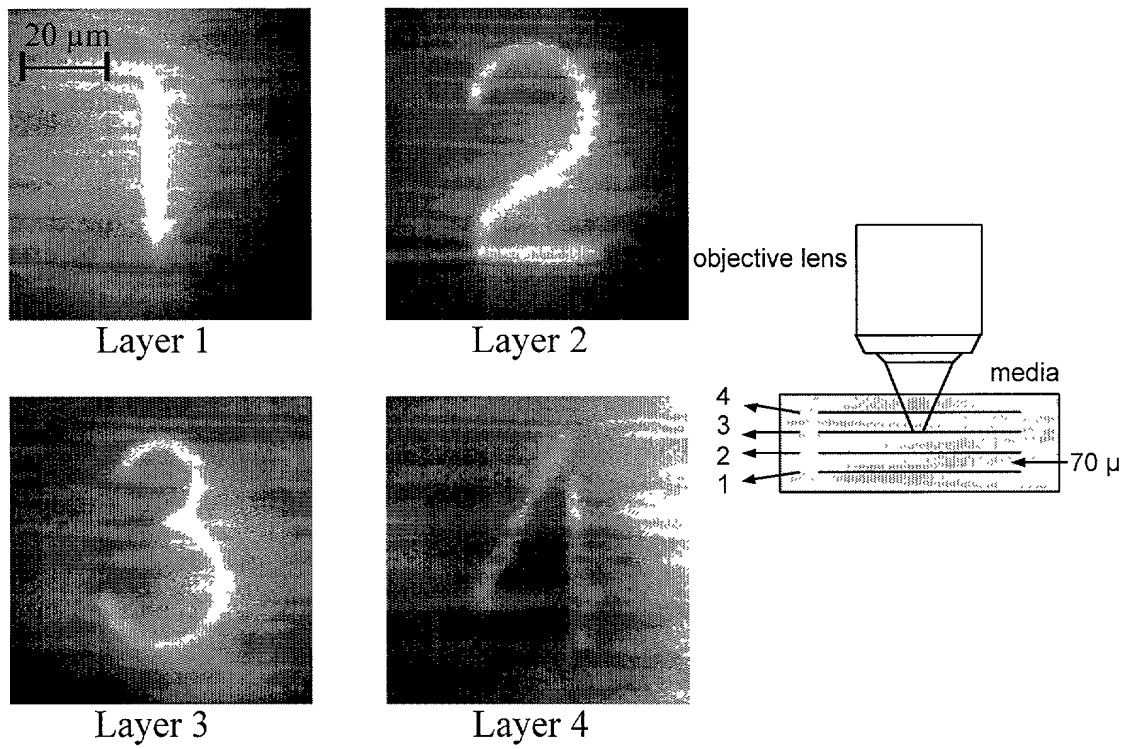


Figure 10

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
PATENT APPLICATION DECLARATION AND POWER OF ATTORNEY
(Page 1 of 2)

EACH OF THE APPLICANTS SIGNING BELOW HEREBY DECLARES THAT:

My residence, post office address, and citizenship are as stated next to my name in PART A on page 2 hereof.

I believe that I am an original, first, and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **THREE-DIMENSIONAL OPTICAL DATA STORAGE IN FLUORESCENT DYE-DOPED PHOTOPOLYMER**, the specification of which is attached hereto.

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby declare that all statements made herein of my knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent(s) issued thereon.

I hereby appoint as my attorney with full power of substitution to prosecute this application and transact all business in the United States Patent and Trademark Office connected therewith:

William C. Fuess Registration Number 30,054

whose mailing address for this application is:

FUESS & DAVIDENAS
Attorneys at Law
10951 Sorrento Valley Road, Suite II-G
San Diego, California 92121-1613
Attention: William C. Fuess

and whose telecommunications numbers are:

Telephone: (619) 452-8293
Facsimile: (619) 452-8293

All correspondence and telephone calls should be directed to William C. Fuess at the address and telephone number referenced above.

See next page 2 attached, signed, and made a part hereof.

PATENT APPLICATION DECLARATION AND POWER OF ATTORNEY
(Page 2 of 2)

PART A: Inventors' Information and Signatures

Full Name of First Inventor: Mark Wang

Citizenship: USA

Post Office Address: 8282 Regents Rd. #302

San Diego, CA 92122

Inventor's Signature: Mark Wang

Date: 4/11/00

Full Name of Second Inventor: Sadik Esener

Citizenship: U.S.A.

Post Office Address: 743 Mario Drive

Solana Beach, CA 92075

Inventor's Signature: Sadik Esener

Date: 4-11-2000

See page 1 to which this page is attached and of which this page is a part.